



H325-V 5 Mode Hand Shower Unit Installation Guide



Model Numbers	Feature Highlights
☐ H325-V 5 Mode Hand Shower Unit	 5 mode hand shower 3" diameter hand shower head In-line vacuum breaker for backflow protection 30" slide bar with cradle for hand shower mounting 60" flexible metal hose Standard 2.5 gpm (9.5 L/min) flow restrictor Shall be metal and nonmetallic construction, plated in standard polished chrome finish
Options/Modifications	
 ☐ -1.5	
Note: Append appropriate -suffix to model number.	Warranty
Compliance	Limited Lifetime - to the original end purchaser in consumer installations. 5 Years - for commercial installations. Refer to www.symmons.com/warranty for complete warranty information.
- ASME A112.18.1/CSA B125.1	


Dimensions

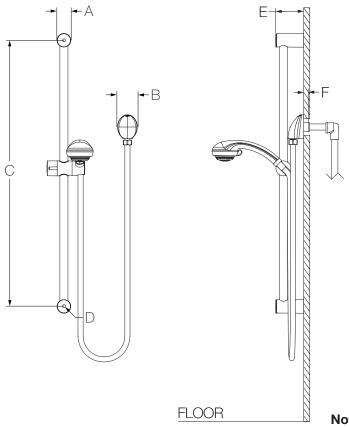

Measurements		
Α	Ø 1-1/2", 38 mm	
В	2-1/8", 54 mm	
С	28-9/16", 725 mm	
D	(2x) Hole Size:	
	Ø 1/4", 6 mm	
Ε	3", 76 mm	
	Male 1/2-14 NPT fitting must	
F	be recessed 1/4" (6 mm)	
	from finished wall	

Note: Dimensions subject to change without notice.

Parts Breakdown

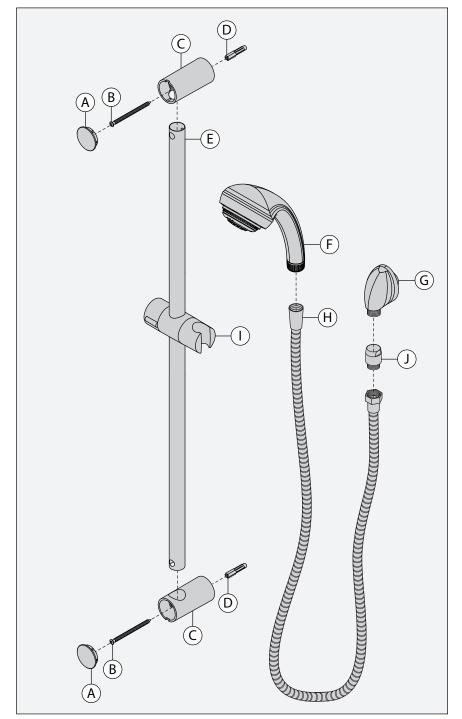

Replacement Parts		
Item	Description	Part Number
Α	(2x) Cap	
В	(2x) Screw (2x) Bar End	
С		
D	(2x) Tile Anchor	
E	30" Bar	RA-005
	48" Bar	RA-006
F	Hand Shower	SC-127
G	Wall Elbow	EF-105
Н	60" Hose	EF-02976
I	Slide Assembly	RA-004
J	Vacuum Breaker	EF-109

Tools Required for Installation		
Adjustable Wrench		
Drill		
Phillips Head Screwdriver		
Plumber Tape		
Silicone		

Notes:

- 1) Apply a bead of silicone around the perimeter of all shower trim installed flush to the finished wall.
- 2) Apply plumber tape to all threaded connections.

WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.