## **TOTO**<sub>®</sub>

# TS112FL53

### **Classic Series Aero Handshower**

### FEATURES

- Air injected AeroJet<sup>™</sup> technology
- 2.0 gpm (7.5 lpm) maximum flow rate
- Multi-spray modes with full spray, cascade flow, and Gyrostream
- 5" diameter spray face
- Rubber nozzles to prevent limescale build up

### COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel



### CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



### Please note the following components are sold separately:



TS101R Wall Outlet



TS101V Handshower Wall-Mount



TS101S Shower Arm Mount



TS101W60 Shower Hose 60"

### PRODUCT SPECIFICATION

The handshower shall have air injected AeroJet technology. Product shall have 2.0 gpm (7.5 lpm) maximum flow rate. Product shall have multi-spray modes with full spray, cascade flow, and Gyrostream. Product shall have 5" diameter spray face. Product shall have rubber nozzles to prevent limescale build up. Product shall be **TOTO Model TS112FL53#**\_\_\_\_\_.

### **Classic Series Aero Handshower**

#### **SPECIFICATIONS**

- Lifetime Limited Warranty Warranty • (Residential Use)
- Material


One Year (Commercial Use) Plastic


- Shipping Weight 1.1 lbs.
- Shipping Dimensions 13-1/4" x 5-1/4" x 2-3/8"
- Maximum Flow Rate 2.0 gpm (7.5 lpm)

#### INSTALLATION NOTES

**OPTIONAL HANDSHOWER COMPONENTS:** 

- TS101R: Wall Outlet
- TS101S: Shower Arm Mount
- TS101V: Handshower Wall-Mount
- TS101W60: Shower Hose 60"

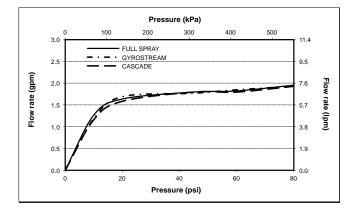

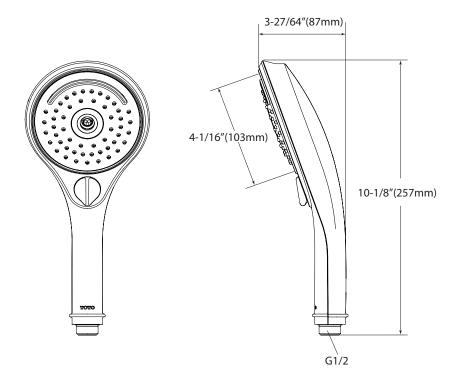

**TOTO** 

These dimensions and specifications are subject to change without notice