TOTO®

MW4463046CEMFGN(A)

Aquia® IV WASHLET®+ S500e
Two-Piece Toilet - 1.28 & 0.9 GPF

FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- UNIVERSAL HEIGHT
- Chrome push-button
- 12" Rough-in
- Elongated front bowl and WASHLET+ S500e and tank set
- EWATER+® auto-cleans wand and bowl
- On-demand remote function cleans wand with EWATER+
- PREMIST® of bowl before each use
- Remote control operated
- Auto flush available as upgrade

MODELS

- **MW4463046CEMFGNA (#01)**
  With CEFIONTECT ceramic glaze, WASHLET+ S500e with contemporary design and Auto Flush
- **CT446CEFGNT40**
  Elongated bowl with CEFIONTECT
- **ST446EMNA**
  Tank and cover only
- **SW3046AT40**
  WASHLET+ S500e
- **THU765**
  Auto Flush Kit
- **9AU321-A**
- **MW4463046CEMFGN (#01)**
  Same as MW4463046CEMFGNA without Auto Flush

OPTIONAL COMPONENTS

- **TSU48.10**
  10" Unifit Rough-In
- **TSU48.14**
  14" Unifit Rough-In
- **THU842#01-A**
  Push Button Assembly - Cotton
- **THU842#PN-A**
  Push Button Assembly - Polished Nickel
- **THU842#BN-A**
  Push Button Assembly - Brushed Nickel

COLORS/FINISHES

- #01 Cotton

DYNAMAX TORNADO FLUSH

CEFIONTECT

UNIVERSAL HEIGHT

EWATER+

Auto Flush

PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF/0.9 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, UNIVERSAL HEIGHT, complete skirted bowl and chrome push-button.
Toilet shall be TOTO Model MW4463046CEMFGN_#01.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements
- ADA compliant (MW4463046CEMFGNA only)

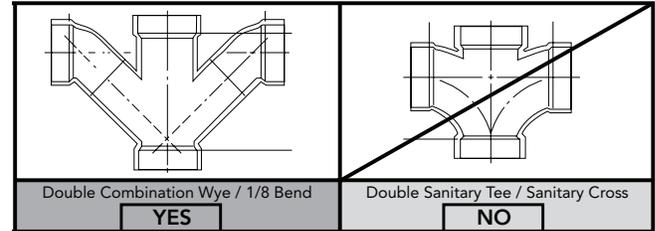# MW4463046CEMFGN(A)

SPECIFICATIONS

Water Use	1.28 & 0.9 GPF (4.8 & 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	7" x 5"
Trap Diameter	2-1/4"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	**CT446CEFGNT40** 83 lbs. **ST446EMNA** 29 lbs.
Shipping Dimensions	**CT446CEFGNT40** 29-5/8" L x 16-3/8" W x 19-3/4" H **ST446EMNA** 17-1/4" L x 7-7/8" W x 17-1/2" H

See SW3046AT40 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES

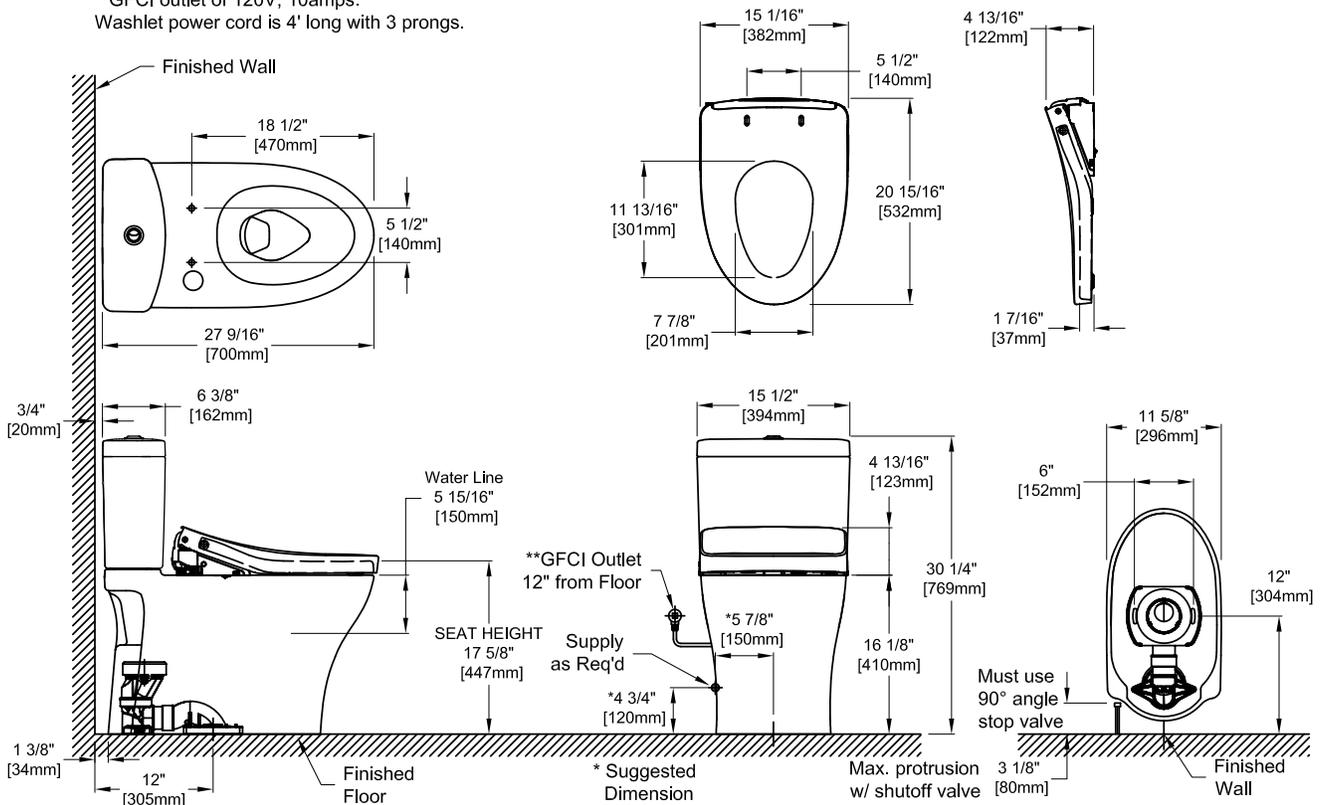Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

Double Combination Wye / 1/8 Bend	Double Sanitary Tee / Sanitary Cross
YES	**NO**

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

**GFCI outlet of 120V, 10amps.
Washlet power cord is 4' long with 3 prongs.